


Dterm Series III User Guide

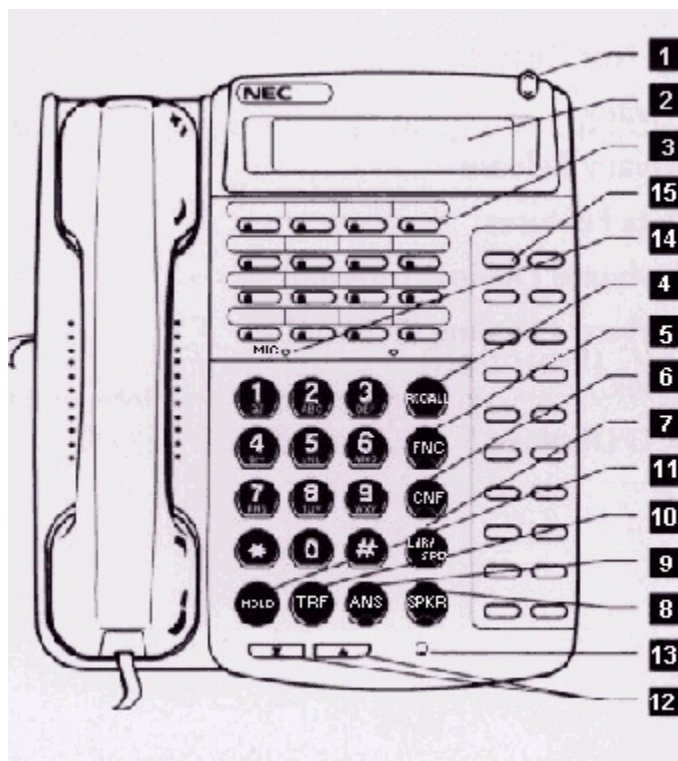

Click on above image to learn about the functions.

1. Call Indicator lamp

Easier to see which phone is ringing, used for message wait as well.

2. Alphanumeric display

Assists the caller by providing visual information relating to the calling number and party's name, number dialed, call status, feature activation and user prompts, as well as a clock and timer.

3. Line/feature access keys

8/16/24 keys/lamps (dual colour) can be used in any combination for the line (extension or exchange) selection, speed dialing or features you can access. Example features:

- [Call Forward.](#)
- [Save and Repeat.](#)
- [Message Reminder.](#)
- [Call Back.](#)

- [Voice Call](#).
- [Call Pick Up](#).

4. Recall button

Press to terminate the established call and reinitialize internal dial tone.

5. Function key

Used to activate terminal setup functions and to program One-Touch Speed Dial/Feature Keys.

Terminal setup functions include:

- Microphone on/off : FNC+1
- Receiver volume : FNC+2
- Ringer tone : FNC+3 (keep pressing for tone 1, 2, 3 or 4.)
- Hands-free on/off : FNC+5 (on) FNC+6 (off)

6. Conference button

To establish a conference call. A red indicator provides visual confirmation that a conference is in session. See instructions below.

7. Last number redial key

Used to activate last number called and speed dialing. (Lift handset and press LNR/SPD to select. Then press # to dial the selected number.)

8. Speaker button

To control the built-in speaker for handsfree dialling and monitoring. Full handsfree dialling operation is a standard feature. A red indicator provides visual confirmation that the speaker is on.

9. Answer button

When the light on this key is lit, press to answer a waiting call.

10. Transfer button

To transfer call, or make a second call.

11. Hold button

To place a call on hold. Note: Press twice to place a call on exclusive hold (no-one else can pick up.) To retrieve the held call lift the handset and press the flashing line. You can also put a call on hold then make another call. You can swap between the two calls by pressing call hold, or hang up on second call and original will ring back.

12. Volume control

To control volume of handset, ringer, display contrast.

- LCD Contrast: Press the "up and down" keys whilst idle.
- Speaker/Receiver Volume: Press "up and down" keys during conversation.
- Ringer Volume: Press "up and down" keys during ringing.

13. Microphone

14. Microphone Lamp

15. User Programmable Keys

12/20 keys can be used in any combination for speed dial, Direct Station Select (DSS) or feature access.

To program Speed Calling:

- Press FNC button.
- Press desired Speed Call Button.
- Enter telephone number or feature code.
- Press FNC again to save.

To dial number in memory:

- Press desired Speed Call Button

To verify:

- Press FNC button.
 - Press desired Speed Call Button.
-

Call Forward All

Forwards all calls immediately.

SET

- Lift handset.
- Press FWD ALL or dial "*1"
- Dial extension number your calls are to be forwarded to.

CANCEL

- Lift handset.
- Press FWD ALL or dial "#1"

Call Forward No Answer

Forwards only after 4-6 rings.

SET

- Lift handset.
- Press FWD NANS or dial "*2"
- Dial extension number your calls are to be forwarded to.

CANCEL

- Lift handset.
- Press FWD NANS or dial "#2"

Call Forward Busy

Forwards only when your extension is busy.

SET

- Lift handset.
- Press FWD BSY or dial "*3"

- Dial extension number your calls are to be forwarded to.

CANCEL

- Lift handset.
 - Press FWD BSY or dial "#3"
-

Save and Repeat

To Save

- Lift handset
- Dial desired telephone number.
- Press S & R.

To Repeat

- Lift handset.
 - Press S & R and number saved is redialled.
-

Message (D/term only)

To Leave a Message

- Lift handset and dial extension.
- Receive no answer or busy signal.
- Press MSG.

To Display Message.

- Press MSG.
- Re-press MSG to display additional messages.

To Respond

- While displaying additional messages press SPKR.
- Press MSG to dial extension which left message.
- Message erased.

To Cancel

- Press MSG to display desired message.
 - Dial # while message on display.
-

Call Back

If you dial a busy extension:

- Press CALL BACK or dial *0
- Hang up.
- You may originate or receive calls during this waiting period.
- When both extensions are free, your phone will ring.
- Lift handset and the other extension will ring.

Cancel

- Lift handset.
- Press CALL BACK or dial #0.

Voice Call (D/term only)

To speak over the intercom to other DTERM telephones only.

- Dial extension.
 - Press VOICE button.
 - Speak over intercom.
 - Replace handset to disconnect
-

Group Call Pick Up

To answer another ringing extension in your group:

- Lift handset and press PICK UP or dial **

Direct Call Pick Up

To answer a specific extension in any area:

- Lift handset and dial ## plus extension number of ringing phone.
-

Conference Call

To establish a 3 way conversation.

- Pick up handset and dial first number required
- Whilst on the call, press Transfer (TRF) button
- Caller will be placed on hold
- Dial extension number or external number
- When called answered by third party, press CNF to establish a 3 way conversation.

Note: Any party may exit conference by hanging up